


ER1000CT THRU ER1006CT



FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O. Flame Retardant Epoxy Molding Compound.
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency.
- Low forward voltage, high current capability
- High surge capacity.
- Super fast recovery times, high voltage.
- Pb free product are available : 99% Sn above can meet RoHS environment substance directive request

MECHANICAL DATA

Case: TO-220AB Molded plastic

Terminals: Lead solderable per MIL-STD-750, Method 2026

Polarity: As marked.

Standard packaging: Any


Weight: 0.08 ounces, 2.24grams.

VOLTAGE RANGE

50 to 600 Volts

CURRENT

10.0 Ampere

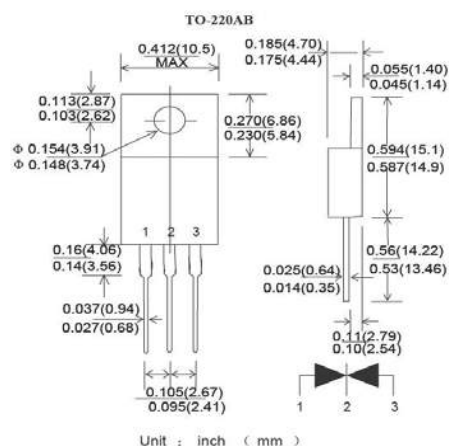

MAXIMUM RATING AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

PARAMETER	SYMBOL	ER1000CT	ER1001CT	ER1001ACT	ER1002CT	ER1003CT	ER1004CT	ER1006CT	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	V
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	V
Maximum Average Forward Current lead length at Tc =100°C	I _{F(AV)}	10.0							A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	150							A
Maximum Forward Voltage at 5A, per element	V _F	0.95				1.30		1.7	V
Maximum DC Reverse Current at TA=25°C Rated DC Blocking VoltageTA=100°C	I _R	10 500							uA
Maximum Reverse Recovery Time (Note 2)	T _{RR}	35				50			ns
Typical Junction capacitance (Note 1)	C _J	62							pF
Maximum Thermal Resistance	R _{θJC}	3.0							°C / W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-50 TO +150							°C

NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
2. Reverse Recovery Test Conditions: $I_F = 5\text{A}$, $I_R = 1\text{A}$, $I_{rr} = 25\text{A}$.
3. Both Bonding and Chip structure are available.

RATINGS AND CHARACTERISTIC CURVES (ER1000CT THRU ER1006CT)

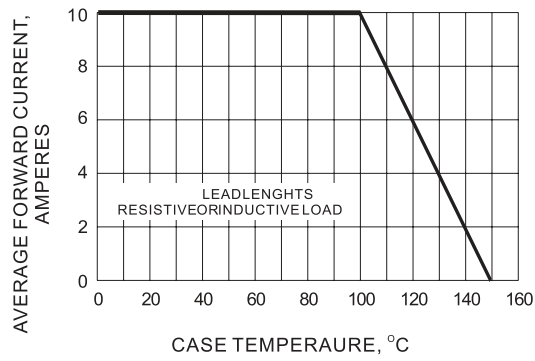


Fig.1- FORWARD CURRENT DERATING CURVE

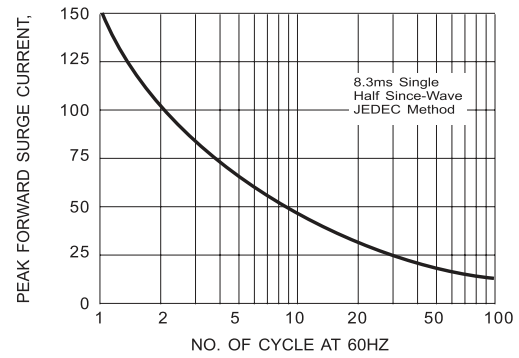


Fig.2- MAXIMUM NON - REPETITIVE SURGE CURRENT

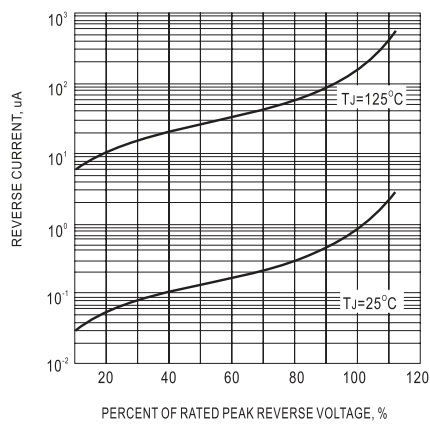


Fig.3- TYPICAL REVERSE CHARACTERISTIC

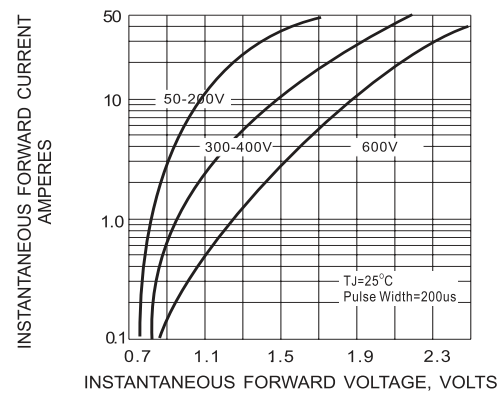


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC